

EXPO
INOX

ADWCo10



ADWCo10

**DOPPIA PARETE
ARIA ARABESCATO**

**DOUBLE WALL AIR
ARABESCATO**

ADWCo10



SISTEMA DOPPIA PARETE ARIA ADWCo10

Il sistema **doppia parete aria ADWCo10** è composto da elementi componibili rigidi con finitura lucida BA, realizzati con parete interna in acciaio inox austenitico AISI 316L BA (EN 1.4404) di spessore minimo 0,4 mm e parete esterna arabescata, conformi agli standard previsti dalla marcatura CE secondo la normativa EN 1856/1-2. La coibentazione è realizzata con "lama d'aria" statica di spessore 10 mm. Gli elementi modulari hanno innesto classico a bicchiere maschio-femmina calibrato per entrambi le pareti con guarnizione di tenuta a triplice labbro da inserire sulla parete interna, conforme alla normativa europea EN 14241-1, e giunzione meccanica con fascetta di sicurezza.

Riferimento normativo e designazione

Marcatura del prodotto secondo la normativa europea: CE 0476 EN 1856-1 / EN 1856-2.

T200 P1 W V2 L50040* O 20 con guarnizione

T600 N1 W V2 L50040 G500 M

* La designazione può variare in funzione della qualità e dello spessore della materia prima come indica la tabella di seguito:

V2 AISI 316L		Vm AISI 304		ISOL.	SPESSORI
EN 1856-1	EXPO INOX	EN 1856/1-2	EXPO INOX		
L50040	ADW10	L20040	EADW10	10 mm	0,4 mm
L50050	ADW10	L20050	EADW10	10 mm	0,5 mm

Utilizzo

Condotti, canali da fumo, camini metallici, esalazioni aria asserviti a generatori di calore di tipo atmosferico, pressurizzato, ad aria soffiata, tradizionali o a condensazione, cappe cucina per uso industriale o domestico, stufe a pellet.

Applicazione

Installazione interna o esterna.

Diametri disponibili - mm

• 60/80 **A RICHIESTA** •

80/100 - 100/120 - 130/150 - 160/180 - 180/200 - 200/220

• 230/250 **A RICHIESTA** •

Diametro 250/270 disponibile **A RICHIESTA**

DOUBLE WALL AIR ADWCo10 SYSTEM

Double wall air ADWCo10 system is composed by modular rigid elements with BA surface finish, made with the inner wall of austenitic stainless steel AISI 316L BA (EN 1.4404) minimum thickness of 0.4 mm and outer wall in arabescato pattern, according to the standards set out by the European CE mark, EN 1856/1-2. Insulation made with "air-blade" system, 10 mm thickness. The modular elements have classic male-female junction calibrated for both sides, with triple seal lip gasket, conforming to European standard EN 14241-1, and mechanical connection with locking clamp.

Normative references and designation

Product marking according to the European standard: CE 0476 EN 1856-1 / EN 1856-2.

T200 P1 W V2 L50040* O 20 with seal

T600 N1 W V2 L50040 G500 M

* The designation may vary according to the quality and thickness of the raw material, as indicated in the table below:

V2 AISI 316L		Vm AISI 304		INSUL.	THICKNESS
EN 1856-1	EXPO INOX	EN 1856/1-2	EXPO INOX		
L50040	ADW10	L20040	EADW10	10 mm	0.4 mm
L50050	ADW10	L20050	EADW10	10 mm	0.5 mm

Utilizations

Ducts, flue pipes, metal chimneys, air conduction subservient to atmospheric heat generators, pressurized, air blown, traditional or condensing, industrial or domestic kitchen hoods, pellet stoves.

Application

Internal or external installation.

Available diameters - mm

• 60/80 **ON REQUEST** •

80/100 - 100/120 - 130/150 - 160/180 - 180/200 - 200/220

• 230/250 **ON REQUEST** •

Diameter 250/270 available **ON REQUEST**

DOPPIA PARETE ARIA ARABESCATO - DOUBLE WALL AIR ARABESCATO



AREXTDP1C...

Elemento lineare da 1 m.

Pipe 1 m.



AREXTDP5C...

Elemento lineare da 0,50 m.




Pipe 0.50 m.



AREXTDP2C...

Elemento lineare da 0,33 m.

Pipe 0.33 m.



Øi	Øe	COD.	A	B	H
60	80	AREXTDP1C06	65	54	940
80	100	AREXTDP1C08	65	54	940
100	120	AREXTDP1C10	65	54	940
130	150	AREXTDP1C13	65	54	940
160	180	AREXTDP1C16	65	54	940
180	200	AREXTDP1C18	65	54	940
200	220	AREXTDP1C20	65	54	940
230	250	AREXTDP1C23	65	54	940
250	270	AREXTDP1C25	65	54	940

Øi	Øe	COD.	A	B	H
60	80	AREXTDP5C06	65	54	440
80	100	AREXTDP5C08	65	54	440
100	120	AREXTDP5C10	65	54	440
130	150	AREXTDP5C13	65	54	440
160	180	AREXTDP5C16	65	54	440
180	200	AREXTDP5C18	65	54	440
200	220	AREXTDP5C20	65	54	440
230	250	AREXTDP5C23	65	54	440
250	270	AREXTDP5C25	65	54	440

Øi	Øe	COD.	A	B	H
60	80	#	#	#	#
80	100	AREXTDP2C08	65	54	270
100	120	AREXTDP2C10	65	54	270
130	150	AREXTDP2C13	65	54	270
160	180	AREXTDP2C16	65	54	270
180	200	AREXTDP2C18	65	54	270
200	220	AREXTDP2C20	65	54	270
230	250	AREXTDP2C23	65	54	270
250	270	AREXTDP2C25	65	54	270


Non disponibile
Not available



AREXTDP25C...

Elemento lineare da 0,25 m.


Pipe 0.25 m.



AREXETDP4C...

Elemento telescopico.


Adjustable pipe.

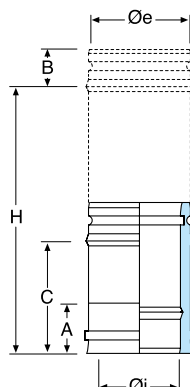

AREXGDP90C...

Curva a 90°.

Elbow 90°.

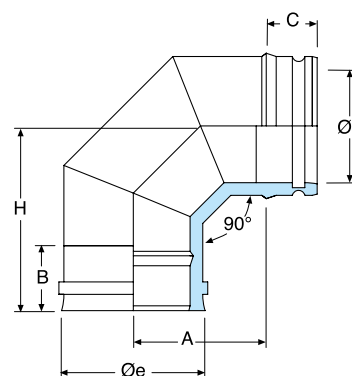

Øi	Øe	COD.	A	B	H
60	80	AREXTDP25C06	65	54	190
80	100	AREXTDP25C08	65	54	190
100	120	AREXTDP25C10	65	54	190
130	150	AREXTDP25C13	65	54	190
160	180	AREXTDP25C16	65	54	190
180	200	AREXTDP25C18	65	54	190
200	220	AREXTDP25C20	65	54	190
230	250	AREXTDP25C23	65	54	190
250	270	AREXTDP25C25	65	54	190

Øi	Øe	COD.	A	B	C	H
60	80	#	#	#	#	#
80	100	AREXETDP4C08	65	54	257	390
100	120	AREXETDP4C10	65	54	257	390
130	150	AREXETDP4C13	65	54	257	390
160	180	AREXETDP4C16	65	54	257	390
180	200	AREXETDP4C18	65	54	257	390
200	220	AREXETDP4C20	65	54	257	390
230	250	AREXETDP4C23	65	54	257	390
250	270	AREXETDP4C25	65	54	257	390

Øi	Øe	COD.	A	B	C	H
60	80	AREXGDP90C06	76	65	54	134
80	100	AREXGDP90C08	145	65	54	149
100	120	AREXGDP90C10	150	65	54	154
130	150	AREXGDP90C13	160	65	54	155
160	180	AREXGDP90C16	180	65	54	181
180	200	AREXGDP90C18	185	65	54	184

Non disponibile
Not available


DOPPIA PARETE ARIA ARABESCATO - DOUBLE WALL AIR ARABESCATO



AREXGDP45C...

Curva a 45°.


Elbow 45°.

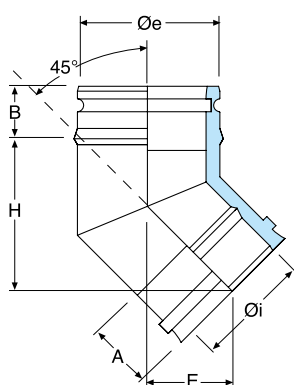

AREXGDP30C...

Curva a 30°.


Elbow 30°.

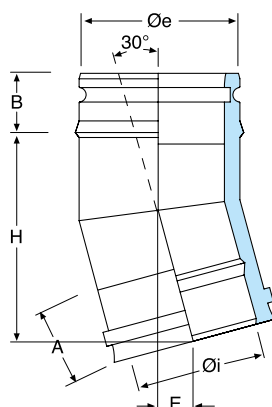

AREXRTDPC...

Raccordo a "T" 90°.

90° tee.

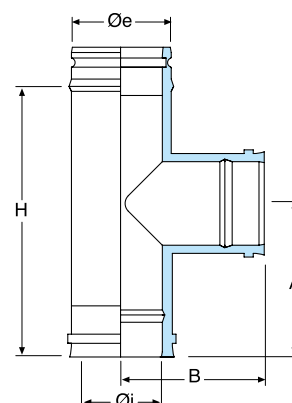

Øi	Øe	COD.	A	B	E	H
60	80	AREXGDP45C06	65	54	60	91
80	100	AREXGDP45C08	65	54	64	98
100	120	AREXGDP45C10	65	54	67	105
130	150	AREXGDP45C13	65	54	75	126
160	180	AREXGDP45C16	65	54	79	137
180	200	AREXGDP45C18	65	54	82	143
200	220	AREXGDP45C20	65	54	88	160
230	250	AREXGDP45C23	65	54	91	164
250	270	AREXGDP45C25	65	54	91	164

Øi	Øe	COD.	A	B	E	H
60	80	#	#	#	#	#
80	100	AREXGDP30C08	65	54	44	116
100	120	AREXGDP30C10	65	54	46	119
130	150	AREXGDP30C13	65	54	48	122
160	180	AREXGDP30C16	65	54	51	130
180	200	AREXGDP30C18	65	54	51	135
200	220	AREXGDP30C20	65	54	53	142
230	250	AREXGDP30C23	65	54	54	147
250	270	AREXGDP30C25	65	54	54	147

Øi	Øe	COD.	A	B	H
60	80	AREXRTDPC06	123	128	190
80	100	AREXRTDPC08	123	138	190
100	120	AREXRTDPC10	163	148	270
130	150	AREXRTDPC13	160	155	270
160	180	AREXRTDPC16	160	170	270
180	200	AREXRTDPC18	245	180	440
200	220	AREXRTDPC20	245	190	440
230	250	AREXRTDPC23	245	205	440
250	270	AREXRTDPC25	245	205	440


Non disponibile
Not available



AREXRTDCU...

Raccordo a "T" 90° uscita monoparete ridotta a Ø 80 mm.


Tee 90° reduced Ø 80 mm single wall.

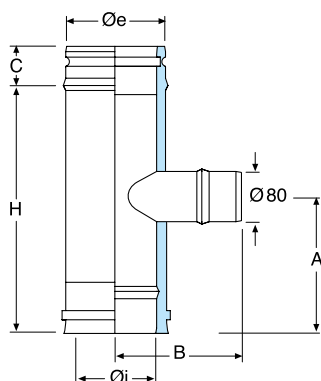

AREXRTDCUDP...

Raccordo a "T" 90° uscita doppia parete ridotta a Ø 80 mm.


Tee 90° reduced Ø 80 mm double wall.

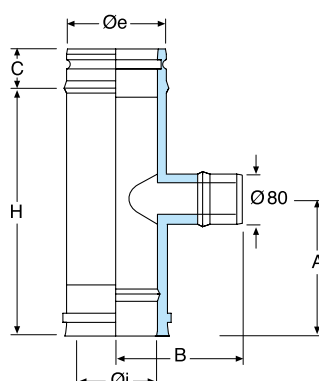

AREXTSIDPC...

Elemento con portello tondo per ispezione T 200°.

Inspection element with round test point T 200°.

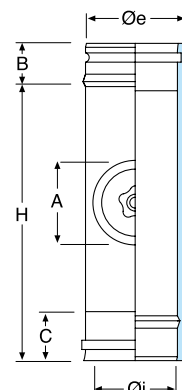

Øi	Øe	COD.	A	B	C	H
60	80	#	#	#	#	#
80	100	AREXRTDCU08	125	70	54	190
100	120	AREXRTDCU10	125	80	54	190
130	150	AREXRTDCU13	125	95	54	190
160	180	AREXRTDCU16	125	110	54	190
180	200	AREXRTDCU18	125	120	54	190
200	220	AREXRTDCU20	125	130	54	190
230	250	AREXRTDCU23	125	145	54	190
250	270	AREXRTDCU25	125	145	54	190

Øi	Øe	COD.	A	B	C	H
60	80	#	#	#	#	#
80	100	#	#	#	#	#
100	120	AREXRTDCUDP10	125	80	54	190
130	150	AREXRTDCUDP13	125	95	54	190
160	180	AREXRTDCUDP16	125	110	54	190
180	200	AREXRTDCUDP18	125	120	54	190
200	220	AREXRTDCUDP20	125	130	54	190
230	250	AREXRTDCUDP23	125	145	54	190
250	270	AREXRTDCUDP25	125	145	54	190

Øi	Øe	COD.	A	B	C	H
60	80	AREXTSIDPC06	60	54	65	190
80	100	AREXTSIDPC08	80	54	65	190
100	120	AREXTSIDPC10	100	54	65	270
130	150	AREXTSIDPC13	130	54	65	270
160	180	AREXTSIDPC16	160	54	65	270
180	200	AREXTSIDPC18	180	54	65	440
200	220	AREXTSIDPC20	200	54	65	440
230	250	AREXTSIDPC23	200	54	65	440
250	270	AREXTSIDPC25	200	54	65	440

Non disponibile
Not available


DOPPIA PARETE ARIA ARABESCATO - DOUBLE WALL AIR ARABESCATO



AREXPF...

Elemento per prelievo fumi.


Fumes test section with threaded sleeve.



AREXPIASTRC...

Piastra di partenza con scarico laterale.


Base plate with drain plug.

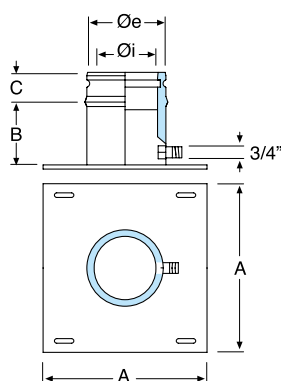

AREXPIASIC...

Piastra intermedia.

Intermediate anchor plate.

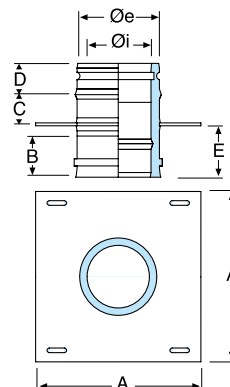

Øi	Øe	COD.	A	B	H
60	80	#	#	#	#
80	100	AREXPF08	65	54	190
100	120	AREXPF10	65	54	190
130	150	AREXPF13	65	54	190
160	180	AREXPF16	65	54	190
180	200	AREXPF18	65	54	190
200	220	AREXPF20	65	54	190
230	250	AREXPF23	65	54	190
250	270	AREXPF25	65	54	190

Øi	Øe	COD.	A	B	C
60	80	#	#	#	#
80	100	AREXPIASTRC08	200	100	54
100	120	AREXPIASTRC10	220	100	54
130	150	AREXPIASTRC13	250	100	54
160	180	AREXPIASTRC16	280	100	54
180	200	AREXPIASTRC18	300	100	54
200	220	AREXPIASTRC20	320	100	54
230	250	AREXPIASTRC23	350	100	54
250	270	AREXPIASTRC25	350	100	54

Øi	Øe	COD.	A	B	C	D	E
60	80	#	#	#	#	#	#
80	100	AREXPIASIC08	200	65	58	54	80
100	120	AREXPIASIC10	220	65	58	54	80
130	150	AREXPIASIC13	250	65	58	54	80
160	180	AREXPIASIC16	280	65	58	54	80
180	200	AREXPIASIC18	300	65	58	54	80
200	220	AREXPIASIC20	320	65	58	54	80
230	250	AREXPIASIC23	350	65	58	54	80
250	270	AREXPIASIC25	350	65	58	54	80

Non disponibile
Not available



RL316CS...

Coppia di supporti per piastra.

Cantilever brackets (pair).



AREXTAPDP4C...

Scarico condensa.




Tee cap with condense drain.



AREXTC...

Tappo cieco.

Tee cap.

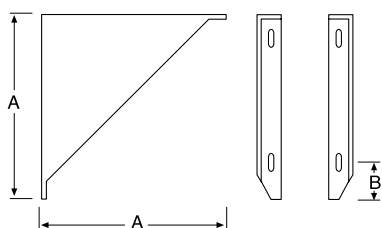

Øi	Øe	COD.	A	B
60	80	RL316CS08	180	32
80	100	RL316CS10	200	32
100	120	RL316CS12	220	32
130	150	RL316CS15	250	32
160	180	RL316CS18	280	32
180	200	RL316CS20	300	32
200	220	RL316CS22	320	32
230	250	RL316CS25	350	32
250	270	RL316CS27	350	32

Øi	Øe	COD.	A	H
60	80	AREXTAPDP4C06	54	115
80	100	AREXTAPDP4C08	54	115
100	120	AREXTAPDP4C10	54	115
130	150	AREXTAPDP4C13	54	115
160	180	AREXTAPDP4C16	54	115
180	200	AREXTAPDP4C18	54	115
200	220	AREXTAPDP4C20	54	115
230	250	AREXTAPDP4C23	54	115
250	270	AREXTAPDP4C25	54	115

Øi	Øe	COD.	A	H
60	80	AREXTC06	54	115
80	100	AREXTC08	54	115
100	120	AREXTC10	54	115
130	150	AREXTC13	54	115
160	180	AREXTC16	54	115
180	200	AREXTC18	54	115
200	220	AREXTC20	54	115
230	250	AREXTC23	54	115
250	270	AREXTC25	54	115

DOPPIA PARETE ARIA ARABESCATO - DOUBLE WALL AIR ARABESCATO



AREXCCDPC...

Cappello cinese.

Rain cap.



AREXTADPC...

Terminale anti intemperie.




Anti draught terminal.



AREXTTCDPC...

Terminale tronco conico.

Venturi cone terminal.

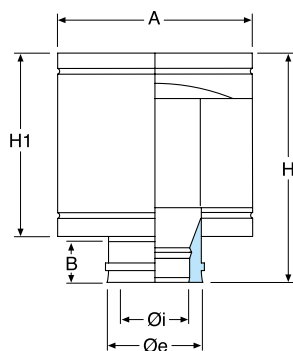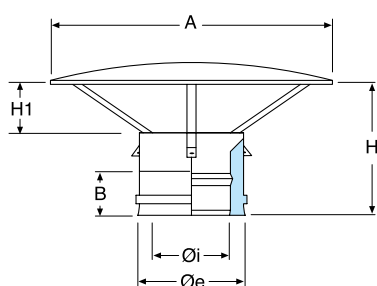

Øi	Øe	COD.	A	B	H	H1
60	80	AREXCCDPC06	180	65	185	50
80	100	AREXCCDPC08	230	65	205	70
100	120	AREXCCDPC10	265	65	205	70
130	150	AREXCCDPC13	265	65	210	75
160	180	AREXCCDPC16	320	65	225	90
180	200	AREXCCDPC18	320	65	235	100
200	220	AREXCCDPC20	400	65	250	115
230	250	AREXCCDPC23	400	65	260	125
250	270	AREXCCDPC25	400	65	260	125

Øi	Øe	COD.	A	B	H	H1
60	80	AREXTADPC06	185	65	240	165
80	100	AREXTADPC08	185	65	240	165
100	120	AREXTADPC10	220	65	240	165
130	150	AREXTADPC13	260	65	260	200
160	180	AREXTADPC16	300	65	280	200
180	200	AREXTADPC18	310	65	320	250
200	220	AREXTADPC20	370	65	340	250
230	250	AREXTADPC23	420	65	340	250
250	270	AREXTADPC25	420	65	340	250

Øi	Øe	COD.	A	H
60	80	AREXTTCDPC06	65	235
80	100	AREXTTCDPC08	65	235
100	120	AREXTTCDPC10	65	235
130	150	AREXTTCDPC13	65	235
160	180	AREXTTCDPC16	65	235
180	200	AREXTTCDPC18	65	235
200	220	AREXTTCDPC20	65	235
230	250	AREXTTCDPC23	65	235
250	270	AREXTTCDPC25	65	235



AREXRCIDP...

Raccordo ingresso mono - doppia
(raccordo per caldaia).

*Adaptor from single to double wall
(boiler adaptor).*



RL316FACSS...

Fascetta di sicurezza.




Locking band.



L316EX3LGN...

Guarnizione di tenuta in silicone nero.

Silicon black seal.




Øi	Øe	COD.	A	H
60	80	#	#	#
80	100	AREXRCIDP08	54	140
100	120	AREXRCIDP10	54	140
130	150	AREXRCIDP13	54	140
160	180	AREXRCIDP16	54	140
180	200	AREXRCIDP18	54	140
200	220	AREXRCIDP20	54	140
230	250	AREXRCIDP23	54	140
250	270	AREXRCIDP25	54	140

Øe	COD.	H
80	RL316FACSS08	20
100	RL316FACSS10	20
120	RL316FACSS12	20
150	RL316FACSS15	20
180	RL316FACSS18	20
200	RL316FACSS20	20
220	RL316FACSS22	20
250	RL316FACSS25	20
270	RL316FACSS27	20

Ø	COD.	H
60	L316EX2GN06	10
80	L316EX3LGN08	10
100	L316EX3LGN10	10
130	L316EX3LGN13	10
160	L316EX3LGN16	10
180	L316EX3LGN18	10
200	L316EX3LGN20	10
230	L316EX3LGN23	10
250	L316EX3LGN25	10


DOPPIA PARETE ARIA ARABESCATO - DOUBLE WALL AIR ARABESCATO

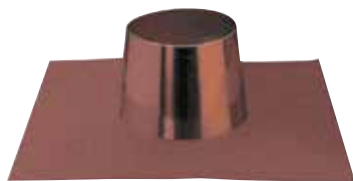

RL316FPPSS...

Falddale piano.


Flat flashing.



RL316FPS5S...

Falddale regolabile da 5° a 30°.


Adjustable flashing from 5° to 30°.




RL316FPS3S...

Falddale regolabile da 30° a 45°.


Adjustable flashing from 30° to 45°.

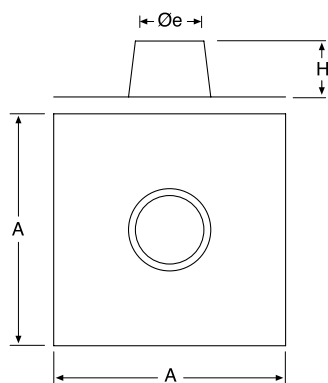

Øi	Øe	COD.	A	H
60	80	RL316FPPSS08	400	120
80	100	RL316FPPSS10	400	120
100	120	RL316FPPSS12	400	130
130	150	RL316FPPSS15	500	150
160	180	RL316FPPSS18	500	170
180	200	RL316FPPSS20	600	180
200	220	RL316FPPSS22	600	210
230	250	RL316FPPSS25	600	210
250	270	RL316FPPSS27	600	210

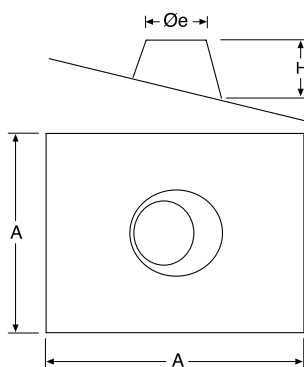

Øi	Øe	COD.	A	H
60	80	RL316FPS5S08	400	120
80	100	RL316FPS5S10	400	120
100	120	RL316FPS5S12	400	130
130	150	RL316FPS5S15	500	150
160	180	RL316FPS5S18	500	170
180	200	RL316FPS5S20	600	180
200	220	RL316FPS5S22	600	210
230	250	RL316FPS5S25	600	210
250	270	RL316FPS5S27	600	210

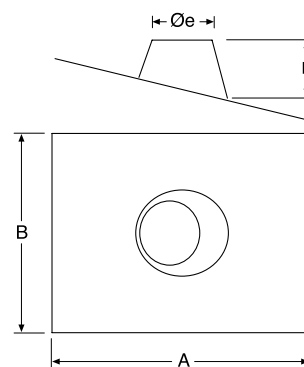

Øi	Øe	COD.	A	B	H
60	80	RL316FPS3S08	550	450	120
80	100	RL316FPS3S10	550	450	120
100	120	RL316FPS3S12	550	450	130
130	150	RL316FPS3S15	650	550	150
160	180	RL316FPS3S18	750	650	170
180	200	RL316FPS3S20	750	650	180
200	220	RL316FPS3S22	750	650	210
230	250	RL316FPS3S25	750	650	210
250	270	RL316FPS3S27	750	650	210



RBFL304AFPPSS...

Faldale piano con base in alluminio.

Flat flashing with aluminum base.



RBFL304AFPS5S...

Faldale regolabile da 5° a 30° con base in alluminio.




Adjustable flashing from 5° to 30° with aluminum base.



RBFL304FPS5S...

Faldale regolabile da 5° a 30° con base in piombo.

Adjustable flashing from 5° to 30° with lead base.

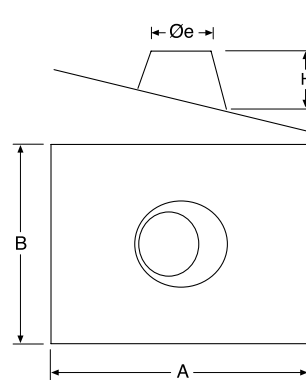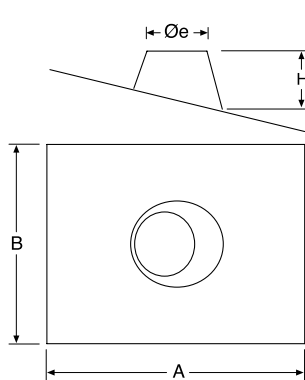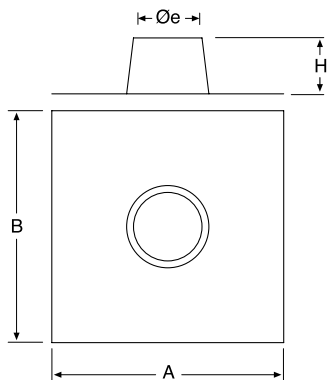

Øi	Øe	COD.	A	B	H
60	80	RBFL304AFPPSS08	450	550	120
80	100	RBFL304AFPPSS10	450	550	120
100	120	RBFL304AFPPSS12	550	650	130
130	150	RBFL304AFPPSS15	550	650	150
160	180	RBFL304AFPPSS18	650	750	170
180	200	RBFL304AFPPSS20	650	750	180
200	220	RBFL304AFPPSS22	650	750	210
230	250	RBFL304AFPPSS25	750	750	210
250	270	RBFL304AFPPSS27	750	750	210

Øi	Øe	COD.	A	B	H
60	80	RBFL304AFPS5S08	750	450	120
80	100	RBFL304AFPS5S10	750	450	120
100	120	RBFL304AFPS5S12	850	550	130
130	150	RBFL304AFPS5S15	850	550	150
160	180	RBFL304AFPS5S18	1000	650	170
180	200	RBFL304AFPS5S20	1000	650	180
200	220	RBFL304AFPS5S22	1000	650	210
230	250	RBFL304AFPS5S25	1000	650	210
250	270	RBFL304AFPS5S27	1000	650	210

Øi	Øe	COD.	A	B	H
60	80	RBFL304FPS5S08	600	500	120
80	100	RBFL304FPS5S10	600	500	120
100	120	RBFL304FPS5S12	600	500	130
130	150	RBFL304FPS5S15	600	600	150
160	180	RBFL304FPS5S18	800	800	170
180	200	RBFL304FPS5S20	800	800	180
200	220	RBFL304FPS5S22	800	800	210
230	250	RBFL304FPS5S25	800	800	210
250	270	RBFL304FPS5S27	800	800	210


DOPPIA PARETE ARIA ARABESCATO - DOUBLE WALL AIR ARABESCATO



RBFL304FPS3S...

Faldale regolabile da 30° a 45° con base in piombo.

Adjustable flashing from 30° to 45° with lead base.

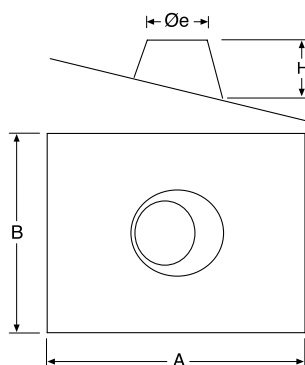


Øi	Øe	COD.	A	B	H
60	80	RBFL304FPS3S08	600	500	120
80	100	RBFL304FPS3S10	600	500	120
100	120	RBFL304FPS3S12	600	500	130
130	150	RBFL304FPS3S15	800	800	150
160	180	RBFL304FPS3S18	800	800	170
180	200	RBFL304FPS3S20	800	800	180
200	220	RBFL304FPS3S22	1000	800	210
230	250	RBFL304FPS3S25	1000	800	210
250	270	RBFL304FPS3S7	1000	800	210




RL316FAPS2S...

Fascetta anti intemperie.

Storm collar.




Øi	Øe	COD.	H
60	80	RL316FAPS2S08	100
80	100	RL316FAPS2S10	100
100	120	RL316FAPS2S12	100
130	150	RL316FAPS2S15	100
160	180	RL316FAPS2S18	100
180	200	RL316FAPS2S20	100
200	220	RL316FAPS2S22	100
230	250	RL316FAPS2S25	100
250	270	RL316FAPS2S27	100




RBFL316FPPSSF...

Faldale piano con fascetta anti intemperie.

Flat flashing with storm collar.

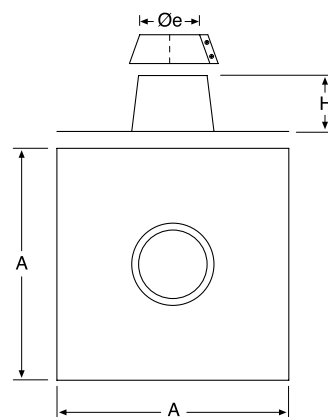


Øi	Øe	COD.	A	H
60	80	RBFL316FPPSSF08	400	120
80	100	RBFL316FPPSSF10	400	120
100	120	RBFL316FPPSSF12	400	130
130	150	RBFL316FPPSSF15	500	150
160	180	RBFL316FPPSSF18	500	170
180	200	RBFL316FPPSSF20	600	180
200	220	RBFL316FPPSSF22	600	210
230	250	RBFL316FPPSSF25	600	210
250	270	RBFL316FPPSSF27	600	210



RBFL316FPS5SF...

Faldale regolabile da 5° a 30° con base in piombo e fascetta anti intemperie.



Adjustable flashing from 5° to 30° with lead base and storm collar.

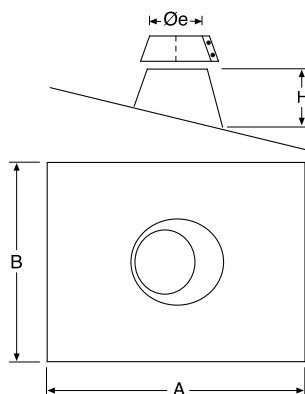

RBFL316FPS3SF...

Faldale regolabile da 30° a 45° con base in piombo e fascetta anti intemperie.


Adjustable flashing from 30° to 45° with lead base and storm collar.

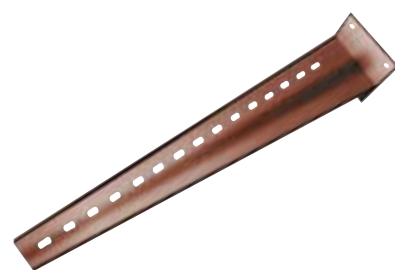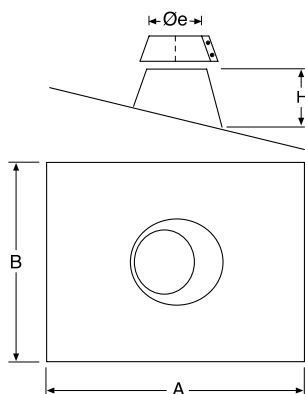

RDISTREG

Distanziale per collare a muro L = 600 mm.

Adjustable distance piece for wall bracket L = 600 mm.

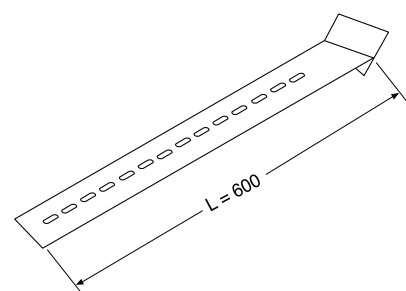

Øi	Øe	COD.	A	B	H
60	80	RBFL316FPS5SF08	600	500	120
80	100	RBFL316FPS5SF10	600	500	120
100	120	RBFL316FPS5SF12	600	500	130
130	150	RBFL316FPS5SF15	600	600	150
160	180	RBFL316FPS5SF18	800	800	170
180	200	RBFL316FPS5SF20	800	800	180
200	220	RBFL316FPS5SF22	800	800	210
230	250	RBFL316FPS5SF25	800	800	210
250	270	RBFL316FPS5SF27	800	800	210

Øi	Øe	COD.	A	B	H
60	80	RBFL316FPS3SF08	600	500	120
80	100	RBFL316FPS3SF10	600	500	120
100	120	RBFL316FPS3SF12	600	500	130
130	150	RBFL316FPS3SF15	800	800	150
160	180	RBFL316FPS3SF18	800	800	170
180	200	RBFL316FPS3SF20	800	800	180
200	220	RBFL316FPS3SF22	1000	800	210
230	250	RBFL316FPS3SF25	1000	800	210
250	270	RBFL316FPS3SF27	1000	800	210

COD.	L
RDISTREG	600

DOPPIA PARETE ARIA ARABESCATO - DOUBLE WALL AIR ARABESCATO



RL316CCT...

Collare a muro con tassello.

Wall bracket with anchor bolt.



RL316COLSS...

Collare a muro.




Wall bracket.



RBFL316CREG...

Collare a muro regolabile da 50 a 100 mm.

Wall bracket adjustable from 50 to 100 mm.

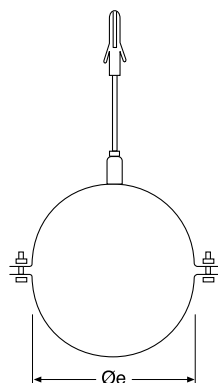

Øe	COD.
80	RL316CCT08
100	RL316CCT10
120	RL316CCT12
150	RL316CCT15
180	RL316CCT18
200	RL316CCT20
220	RL316CCT22
250	RL316CCT25
270	RL316CCT27

Øe	COD.	A	H
80	RL316COLSS08	50	40
100	RL316COLSS10	50	40
120	RL316COLSS12	50	40
150	RL316COLSS15	50	40
180	RL316COLSS18	50	40
200	RL316COLSS20	50	40
220	RL316COLSS22	50	40
250	RL316COLSS25	50	40
270	RL316COLSS27	50	40

Øe	COD.	A	H
80	RBFL316CREG08	50-100	40
100	RBFL316CREG10	50-100	40
120	RBFL316CREG12	50-100	40
150	RBFL316CREG15	50-100	40
180	RBFL316CREG18	50-100	40
200	RBFL316CREG20	50-100	40
220	RBFL316CREG22	50-100	40
250	RBFL316CREG25	50-100	40
270	RBFL316CREG27	50-100	40



RL316DIS...

Distanziale per collare a muro.


Extension for wall bracket single wall.



RL316FCPSS...

Collare per cavi tiranti.




Guy wire bracket.

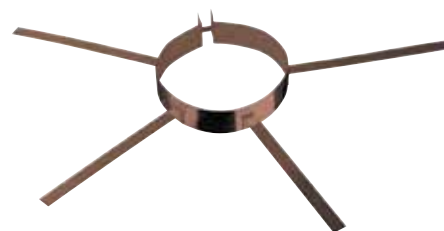

RL316CD...

Collare distanziatore per intubamenti.

Spacing bracket.

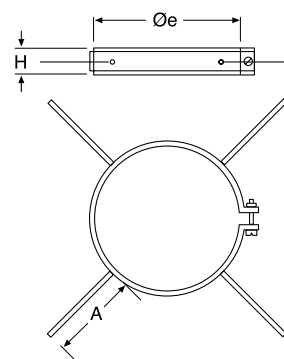

Øe	COD.	H
80	RL316DIS08	40
100	RL316DIS10	40
120	RL316DIS12	40
150	RL316DIS15	40
180	RL316DIS18	40
200	RL316DIS20	40
220	RL316DIS22	40
250	RL316DIS25	40
270	RL316DIS27	40

Øe	COD.	H
80	RL316FCPSS08	40
100	RL316FCPSS10	40
120	RL316FCPSS12	40
150	RL316FCPSS15	40
180	RL316FCPSS18	40
200	RL316FCPSS20	40
220	RL316FCPSS22	40
250	RL316FCPSS25	40
270	RL316FCPSS27	40

Øe	COD.	A	H
80	RL316CD08	300	40
100	RL316CD10	300	40
120	RL316CD12	300	40
150	RL316CD15	300	40
180	RL316CD18	300	40
200	RL316CD20	300	40
220	RL316CD22	300	40
250	RL316CD25	300	40
270	RL316CD27	300	40



RL316CR...

Collare per ritubazione.


Bracket for re-piping.



LUBGN

Lubrificante per guarnizione.

Lubricant for seal.



Øe	COD.
80	RL316CR08
100	RL316CR10
120	RL316CR12
150	RL316CR15
180	RL316CR18
200	RL316CR20
220	RL316CR22
250	RL316CR25
270	RL316CR27

COD.
LUBGN

