



COAXY
CLVp 3CEp

SISTEMA
COASSIALE

COAXIAL
SYSTEM

P1

COAXY - CLVp 3CEp

COAXY - CLVp 3CEp

A RICHIESTA
ON DEMAND



SISTEMA COASSIALE COAXY - CLVp 3CEp

Il sistema **coassiale COAXY - CLVp 3CEp** è composto da elementi componibili rigidi con finitura lucida BA, realizzati in acciaio inox austenitico AISI 316L BA (1.4404) di spessore minimo 0,4 mm conformi agli standard previsti dalla marcatura CE secondo la normativa EN 1856-1. Gli elementi modulari hanno innesto classico a bicchiere maschio-femmina calibrato con guarnizione di tenuta a triplice labbro, conforme alla normativa europea EN 14241-1, e giunzione meccanica con fascetta di sicurezza.

Riferimento normativo e designazione

Marcatura prodotto secondo normativa europea EN 1856-1.

T200 P1 W V2 L50040 O30

T200 P1 W V2 L50050 O30

T200 P1 W V2 L50060 O30

T200 P1 W V2 L50080 O30

Utilizzo

Il sistema CLVp 3CEp è un sistema collettivo di aspirazione d'aria comburente ed evacuazione dei prodotti della combustione destinato ad apparecchi a gas a tenuta stagna di tipo C42, C43, C82 ou C(10)2, C(10)3, C(12)2, C(12)3.

Il sistema funziona in pressione positiva.

Applicazione

Installazione interna.

Diametri - mm • **A RICHIESTA**

100/150 - 110/180 - 130/200 - 150/230 - 180/250 -
200/300 - 230/350 - 250/400

Guarnizione in silicone compresa e montata.
Fascetta di sicurezza compresa (cod. L316EXFACSS).

COAXIAL SYSTEM COAXY - CLVp 3CEp

Coaxial COAXY - CLVp 3CEp system is composed by modular elements with BA surface finish, made of austenitic stainless steel AISI 316 LBA (1.4404) minimum thickness of 0.4 mm, according to the standards set out by the European CE mark, EN 1856-1. The modular elements have classic calibrate male-female junction, with triple seal lip gasket, conforming to European standard EN 14241-1, and mechanical connection with locking clamp.

Normative references and designation

Product marking according to the European standard EN 1856-1.

T200 P1 W V2 L50040 O30

T200 P1 W V2 L50050 O30

T200 P1 W V2 L50060 O30

T200 P1 W V2 L50080 O30

Utilizations

The CLVp 3CEp system is a collective system for the intake of combustion air and for the evacuation of combustion products for gas appliances type C42, C43, C82 ou C(10)2, C(10)3, C(12)2, C(12)3.

The system works in positive pressure.

Application

Internal installation.

Diameters - mm • **ON REQUEST**

100/150 - 110/180 - 130/200 - 150/230 - 180/250 -
200/300 - 230/350 - 250/400

Items are complete of silicone seal and
external locking bands (cod. L316EXFACSS).

SISTEMA COASSIALE - COAXIAL SYSTEM AISI 316L



CLVP1...

Elemento lineare da 1 m.

Pipe 1 m.



CLVP05...

Elemento lineare da 0,50 m.




Pipe 0.50 m.



CLVP02...

Elemento lineare da 0,25 m.

Pipe 0.25 m.

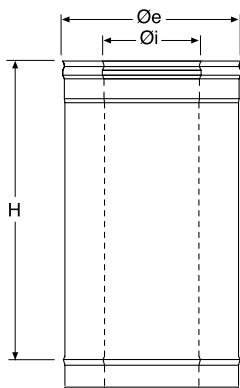

Øi	Øe	COD.	H
100	150	CLVP11015	940
110	180	CLVP11118	940
130	200	CLVP11320	940
150	230	CLVP11523	940
180	250	CLVP11825	940
200	300	CLVP12030	940
230	350	CLVP12335	940
250	400	CLVP12540	940

Øi	Øe	COD.	H
100	150	CLVP051015	440
110	180	CLVP051118	440
130	200	CLVP051320	440
150	230	CLVP051523	440
180	250	CLVP051825	440
200	300	CLVP052030	440
230	350	CLVP052335	440
250	400	CLVP052540	440

Øi	Øe	COD.	H
100	150	CLVP021015	190
110	180	CLVP021118	190
130	200	CLVP021320	190
150	230	CLVP021523	190
180	250	CLVP021825	190
200	300	CLVP022030	190
230	350	CLVP022335	190
250	400	CLVP022540	190

COAXY - CLVp 3CEp



CLVPEV1...

Elemento telescopico 930-1330 mm.

Adjustable pipe 930-1330 mm.



CLVPEV2...

Elemento telescopico 750-1200 mm.




Adjustable pipe 750-1200 mm.



CLVPEV3...

Elemento telescopico 450-800 mm.

Adjustable pipe 450-800 mm.

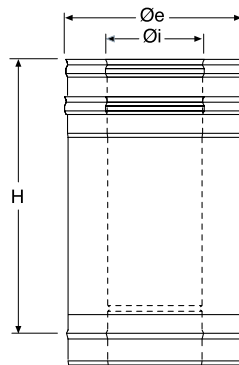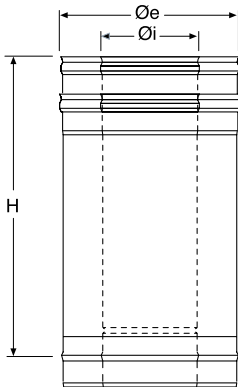

Øi	Øe	COD.	H
100	150	CLVPEV11015	930-1330
110	180	CLVPEV11118	930-1330
130	200	CLVPEV11320	930-1330
150	230	CLVPEV11523	930-1330
180	250	CLVPEV11825	930-1330
200	300	CLVPEV12030	930-1330
230	350	CLVPEV12335	930-1330
250	400	CLVPEV12540	930-1330

Øi	Øe	COD.	H
100	150	CLVPEV21015	750-1200
110	180	CLVPEV21118	750-1200
130	200	CLVPEV21320	750-1200
150	230	CLVPEV21523	750-1200
180	250	CLVPEV21825	750-1200
200	300	CLVPEV22030	750-1200
230	350	CLVPEV22335	750-1200
250	400	CLVPEV22540	750-1200

Øi	Øe	COD.	H
100	150	CLVPEV31015	450-800
110	180	CLVPEV31118	450-800
130	200	CLVPEV31320	450-800
150	230	CLVPEV31523	450-800
180	250	CLVPEV31825	450-800
200	300	CLVPEV32030	450-800
230	350	CLVPEV32335	450-800
250	400	CLVPEV32540	450-800


SISTEMA COASSIALE - COAXIAL SYSTEM AISI 316L



CLVPG45...

Curva a 45°.


Elbow 45°.

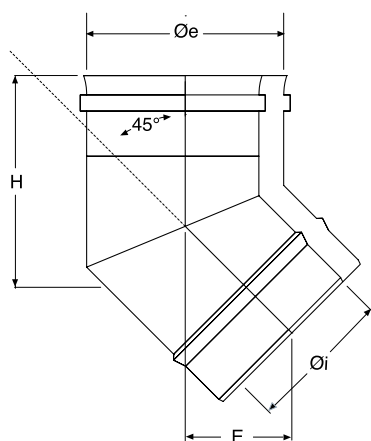

CLVPG30...

Curva a 30°.


Elbow 30°.

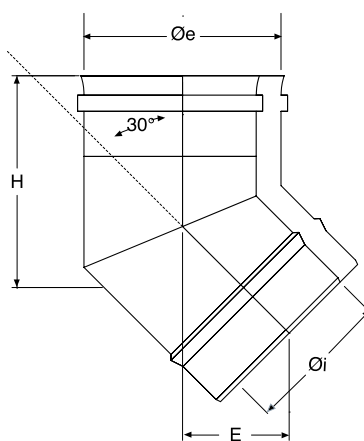

CLVPPI...

Piastra intermedia.

Intermediate anchor plate.

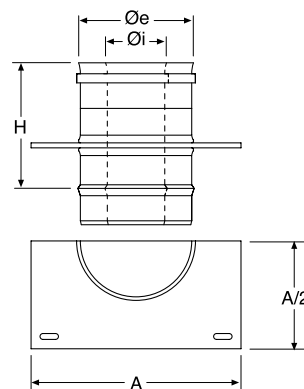

Øi	Øe	COD.	E	H
100	150	CLVPG451015	75	126
110	180	CLVPG451118	79	137
130	200	CLVPG451320	82	143
150	230	CLVPG451523	88	160
180	250	CLVPG451825	91	164
200	300	CLVPG452030	98	184
230	350	CLVPG452335	105	197
250	400	CLVPG452540	114	215

Øi	Øe	COD.	E	H
100	150	CLVPG301015	48	122
110	180	CLVPG301118	51	130
130	200	CLVPG301320	51	135
150	230	CLVPG301523	53	142
180	250	CLVPG301825	54	147
200	300	CLVPG302030	57	160
230	350	CLVPG302335	60	172
250	400	CLVPG302540	63	184

Øi	Øe	COD.	A	H
100	150	CLVPPI1015	350	190
110	180	CLVPPI1118	350	190
130	200	CLVPPI1320	350	190
150	230	CLVPPI1523	350	190
180	250	CLVPPI1825	350	190
200	300	CLVPPI2030	350	190
230	350	CLVPPI2335	350	190
250	400	CLVPPI2540	350	190


COAXY - CLVp 3CEp



CLVPCX1...

Raccordo a "T" 93° con condotto coassiale Ø 60 interno (gas) Ø 100 esterno (aria).


93° tee with coaxial duct Ø 60 internal (gas) Ø 100 external (air).

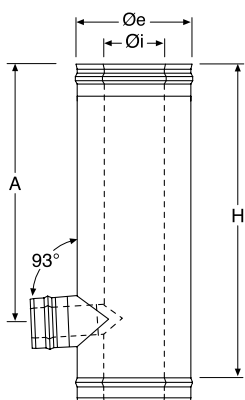

CLVPCX490...

Raccordo a "T" 93° con due condotti a 90° coassiali Ø 60 interno (gas) Ø 100 esterno (aria).


93° tee with two ducts at 90° coaxial Ø 60 internal (gas) Ø 100 external (air).

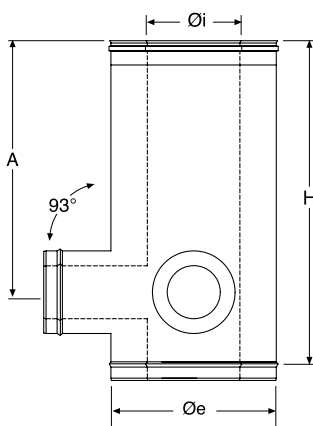

CLVPCX418..

Raccordo a "T" 93° con due condotti a 180° coassiali Ø 60 interno (gas) Ø 100 esterno (aria).

93° tee with two ducts at 180° coaxial Ø 60 internal (gas) Ø 100 external (air).

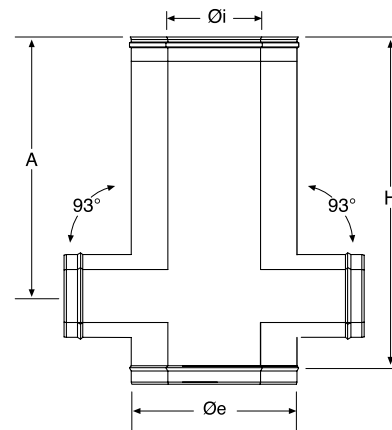

Øi	Øe	COD.	A	H
100	150	CLVPCX11015	830	940
110	180	CLVPCX11118	830	940
130	200	CLVPCX11320	830	940
150	230	CLVPCX11523	830	940
180	250	CLVPCX11825	830	940
200	300	CLVPCX12030	830	940
230	350	CLVPCX12335	830	940
250	400	CLVPCX12540	830	940

Øi	Øe	COD.	A	H
100	150	CLVPCX4901015	830	940
110	180	CLVPCX4901118	830	940
130	200	CLVPCX4901320	830	940
150	230	CLVPCX4901523	830	940
180	250	CLVPCX4901825	830	940
200	300	CLVPCX4902030	830	940
230	350	CLVPCX4902335	830	940
250	400	CLVPCX4902540	830	940

Øi	Øe	COD.	A	H
100	150	CLVPCX4181015	830	940
110	180	CLVPCX4181118	830	940
130	200	CLVPCX4181320	830	940
150	230	CLVPCX4181523	830	940
180	250	CLVPCX4181825	830	940
200	300	CLVPCX4182030	830	940
230	350	CLVPCX4182335	830	940
250	400	CLVPCX4182540	830	940


SISTEMA COASSIALE - COAXIAL SYSTEM AISI 316L



CLVPCX3...

Raccordo a "T" 93° con condotto coassiale Ø 80 interno (gas) Ø 125 esterno (aria).


93° tee with coaxial duct Ø 80 internal (gas) Ø 125 external (air).

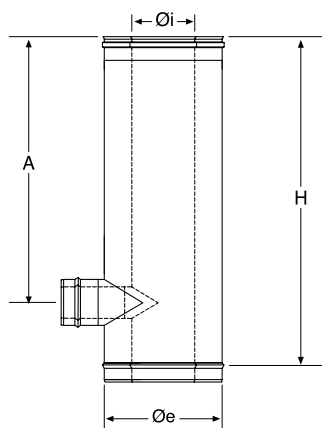

CLVPCX390...

Raccordo a "T" 93° con due condotti a 90° coassiali Ø 80 interno (gas) Ø 125 esterno (aria).


93° tee with two ducts at 90° coaxial Ø 80 internal (gas) Ø 125 external (air).

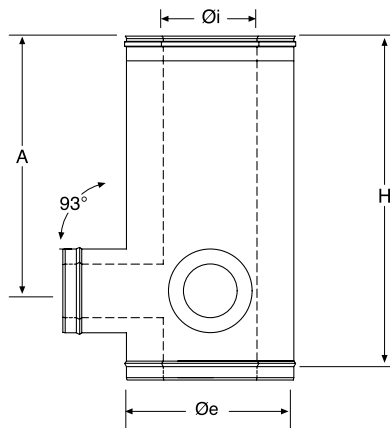

CLVPCX318...

Raccordo a "T" 93° con due condotti a 180° coassiali Ø 80 interno (gas) Ø 125 esterno (aria).

93° tee with two ducts at 180° coaxial Ø 80 internal (gas) Ø 125 external (air).

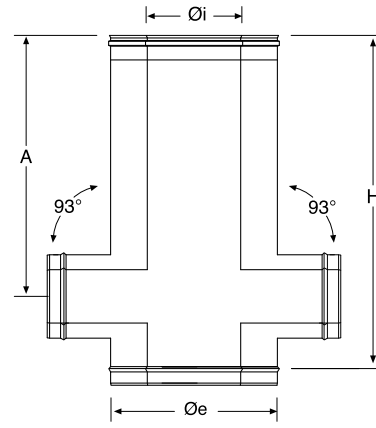

Øi	Øe	COD.	A	H
100	150	CLVPCX31015	817	940
110	180	CLVPCX31118	817	940
130	200	CLVPCX31320	817	940
150	230	CLVPCX31523	817	940
180	250	CLVPCX31825	817	940
200	300	CLVPCX32030	817	940
230	350	CLVPCX32335	817	940
250	400	CLVPCX32540	817	940

Øi	Øe	COD.	A	H
100	150	CLVPCX3901015	817	940
110	180	CLVPCX3901118	817	940
130	200	CLVPCX3901320	817	940
150	230	CLVPCX3901523	817	940
180	250	CLVPCX3901825	817	940
200	300	CLVPCX3902030	817	940
230	350	CLVPCX3902335	817	940
250	400	CLVPCX3902540	817	940

Øi	Øe	COD.	A	H
100	150	CLVPCX3181015	817	940
110	180	CLVPCX3181118	817	940
130	200	CLVPCX3181320	817	940
150	230	CLVPCX3181523	817	940
180	250	CLVPCX3181825	817	940
200	300	CLVPCX3182030	817	940
230	350	CLVPCX3182335	817	940
250	400	CLVPCX3182540	817	940


COAXY - CLVp 3CEp



CLVPR061...

Raccordo a "T" 93° con due condotti Ø 60 monoparete (1 gas + 1 aria) interasse mm 120.

93° tee with two Ø 60 single wall ducts (1 gas + 1 air) interaxis 120 mm.

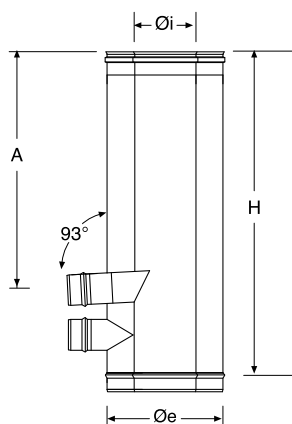


Øi	Øe	COD.	A	H
100	150	CLVPR0611015	720	940
110	180	CLVPR0611118	720	940
130	200	CLVPR0611320	720	940
150	230	CLVPR0611523	720	940
180	250	CLVPR0611825	720	940
200	300	CLVPR0612030	720	940
230	350	CLVPR0612335	720	940
250	400	CLVPR0612540	720	940



CLVPR06901...

Raccordo a "T" 93° con quattro condotti a 90° Ø 60 monoparete (2 gas + 2 aria) interasse mm 120.

93° tee with four Ø 60 single wall ducts at 90° (2 gas + 2 air) interaxis 120 mm.

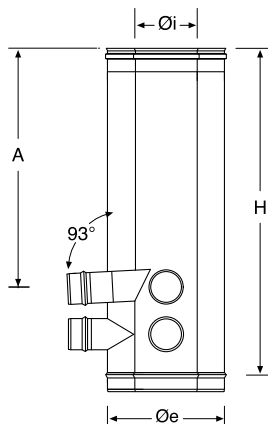


Øi	Øe	COD.	A	H
100	150	CLVPR069011015	720	940
110	180	CLVPR069011118	720	940
130	200	CLVPR069011320	720	940
150	230	CLVPR069011523	720	940
180	250	CLVPR069011825	720	940
200	300	CLVPR069012030	720	940
230	350	CLVPR069012335	720	940
250	400	CLVPR069012540	720	940



CLVPR06181...

Raccordo a "T" 93° con quattro condotti a 180° Ø 60 monoparete (2 gas + 2 aria) interasse mm 120.

93° tee with four Ø 60 single wall ducts at 180° (2 gas + 2 air) interaxis 120 mm.

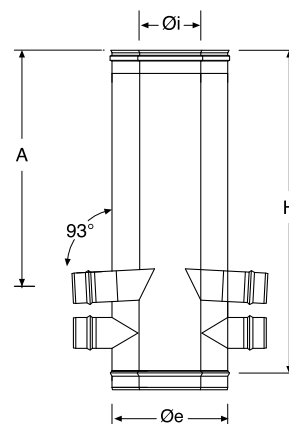

Øi	Øe	COD.	A	H
100	150	CLVPR061811015	720	940
110	180	CLVPR061811118	720	940
130	200	CLVPR061811320	720	940
150	230	CLVPR061811523	720	940
180	250	CLVPR061811825	720	940
200	300	CLVPR061812030	720	940
230	350	CLVPR061812335	720	940
250	400	CLVPR061812540	720	940


SISTEMA COASSIALE - COAXIAL SYSTEM AISI 316L



CLVPR081...

Raccordo a "T" 93° con due condotti Ø 80 monoparete (1 gas + 1 aria) interasse mm 120.

93° tee with two Ø 80 single wall ducts (1 gas + 1 air) interaxis 120 mm.

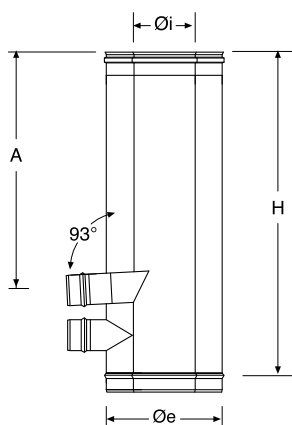


Øi	Øe	COD.	A	H
100	150	CLVPR0811015	720	940
110	180	CLVPR0811118	720	940
130	200	CLVPR0811320	720	940
150	230	CLVPR0811523	720	940
180	250	CLVPR0811825	720	940
200	300	CLVPR0812030	720	940
230	350	CLVPR0812335	720	940
250	400	CLVPR0812540	720	940



CLVPR08901...

Raccordo a "T" 93° con quattro condotti Ø 80 monoparete (2 gas + 2 aria) interasse mm 120.

93° tee with four Ø 80 single wall ducts at 90° (2 gas + 2 air) interaxis 120 mm.

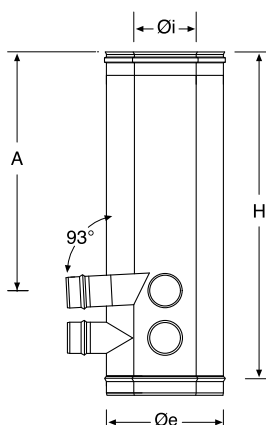


Øi	Øe	COD.	A	H
100	150	CLVPR089011015	720	940
110	180	CLVPR089011118	720	940
130	200	CLVPR089011320	720	940
150	230	CLVPR089011523	720	940
180	250	CLVPR089011825	720	940
200	300	CLVPR089012030	720	940
230	350	CLVPR089012335	720	940
250	400	CLVPR089012540	720	940



CLVPR08181...

Raccordo a "T" 93° con quattro condotti Ø 80 monoparete (2 gas + 2 aria) interasse mm 120.

93° tee with four Ø 80 single wall ducts at 180° (2 gas + 2 air) interaxis 120 mm.

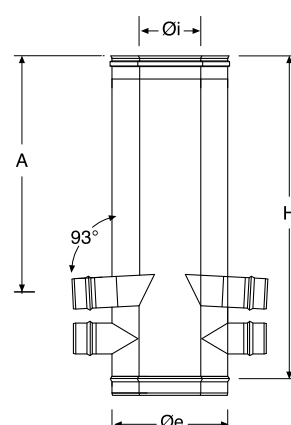

Øi	Øe	COD.	A	H
100	150	CLVPR08181015	720	940
110	180	CLVPR08181118	720	940
130	200	CLVPR08181320	720	940
150	230	CLVPR08181523	720	940
180	250	CLVPR08181825	720	940
200	300	CLVPR08182030	720	940
230	350	CLVPR08182335	720	940
250	400	CLVPR08182540	720	940


COAXY - CLVp 3CEp



CLVPTDE..

Terminale antivento doppio con ventilazione aria.

Double anti downdraught terminal with air ventilation.

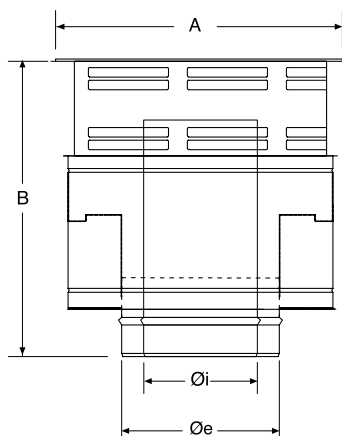


Øi	Øe	COD.	A	B
100	150	CLVPTDE1015	300	410
110	180	CLVPTDE1118	350	450
130	200	CLVPTDE1320	350	460
150	230	CLVPTDE1523	400	520
180	250	CLVPTDE1825	450	570
200	300	CLVPTDE2030	500	620
230	350	CLVPTDE2335	750	850
250	400	CLVPTDE2540	850	950



CLVPSC2...

Tappo scarico condensa con doppio manicotto filettato.

Tee cap with condense drain and double threaded sleeve.




Øi	Øe	COD.	H
100	150	CLVPSC21015	80
110	180	CLVPSC21118	80
130	200	CLVPSC21320	80
150	230	CLVPSC21523	80
180	250	CLVPSC21825	80
200	300	CLVPSC22030	80
230	350	CLVPSC22335	80
250	400	CLVPSC22540	80



CLVPTCS...

Tappo cieco.

Tee cap.



Øi	Øe	COD.	H
100	150	CLVPTCS1015	65
110	180	CLVPTCS1118	65
130	200	CLVPTCS1320	65
150	230	CLVPTCS1523	65
180	250	CLVPTCS1825	65
200	300	CLVPTCS2030	65
230	350	CLVPTCS2335	65
250	400	CLVPTCS2540	65

SISTEMA COASSIALE - COAXIAL SYSTEM AISI 316L



CLVPSIFONE

Sifone.

Siphon.



L316EX3LGN...

Guarnizione di tenuta in silicone nero.



Silicon black seal.



BFL316FPPSSF...

Faldale piano con fascetta anti intemperie.

Flat flashing with storm collar.

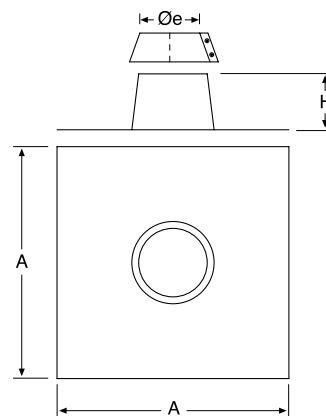

COD.
CLVPSIFONE

Øi	COD.	H
100	L316EX3LGN10	10
110	L316EX3LGN11	10
130	L316EX3LGN13	10
150	L316EX3LGN15	10
180	L316EX3LGN18	10
200	L316EX3LGN20	10
230	L316EX2GN23	10
250	L316EX3LGN25	10

Øi	Øe	COD.	A	H
100	150	BFL316FPPSSF15	500	150
110	180	BFL316FPPSSF18	500	170
130	200	BFL316FPPSSF20	600	180
150	230	BFL316FPPSSF23	600	210
180	250	BFL316FPPSSF25	600	210
200	300	BFL316FPPSSF30	600	230
230	350	BFL316FPPSSF35	680	230
250	400	BFL316FPPSSF40	700	200


COAXY - CLVp 3CEp



BFL316FPS5SF...

Faldale regolabile da 5° a 30° con base in piombo e fascetta anti intemperie.

Adjustable flashing from 5° to 30° with lead base and storm collar.

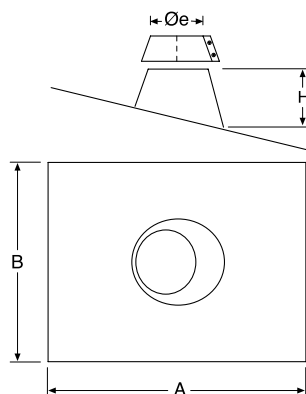


Øi	Øe	COD.	A	B	H
100	150	BFL316FPS5SF15	600	600	150
110	180	BFL316FPS5SF18	800	800	170
130	200	BFL316FPS5SF20	800	800	180
150	230	BFL316FPS5SF23	800	800	210
180	250	BFL316FPS5SF25	800	800	210
200	300	BFL316FPS5SF30	800	800	230
230	350	BFL316FPS5SF35	1000	800	230
250	400	BFL316FPS5SF40	1000	1000	200



BFL316FPS3SF...

Faldale regolabile da 30° a 45° con base in piombo e fascetta anti intemperie.

Adjustable flashing from 30° to 45° with lead base and storm collar.

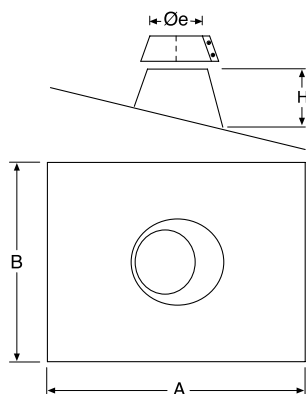


Øi	Øe	COD.	A	B	H
100	150	BFL316FPS3SF15	800	800	150
110	180	BFL316FPS3SF18	800	800	170
130	200	BFL316FPS3SF20	800	800	180
150	230	BFL316FPS3SF23	1000	800	210
180	250	BFL316FPS3SF25	1000	800	210
200	300	BFL316FPS3SF30	1000	800	230
230	350	BFL316FPS3SF35	1000	1000	250
250	400	BFL316FPS3SF40	1000	1000	250



L316EXFAPS2S...

Fascetta anti intemperie.

Storm collar.



Øi	Øe	COD.	H
100	150	L316EXFAPS2S15	100
110	180	L316EXFAPS2S18	100
130	200	L316EXFAPS2S20	100
150	230	L316EXFAPS2S23	100
180	250	L316EXFAPS2S25	100
200	300	L316EXFAPS2S30	100
230	350	L316EXFAPS2S35	100
250	400	L316EXFAPS2S40	100

SISTEMA COASSIALE - COAXIAL SYSTEM AISI 316L



BFL316CREG...

Collare a muro regolabile. Non utilizzare con cod. CLVPEV1, CLVPEV2 e CLVPEV3.

Adjustable wall bracket. Do not use with cod. CLVPEV1, CLVPEV2 and CLVPEV3.



L316EXCS...

Coppia di supporti per piastra.




Cantilever brackets (pair).



L316EXCOLSS10...

Collare a muro regolabile da 50 a 100 mm rinforzato. Utilizzare con cod. CLVPEV1, CLVPEV2 e CLVPEV3.

Adjustable wall bracket from 50 to 100 mm reinforced. To be used with cod. CLVPEV1, CLVPEV2 and CLVPEV3.

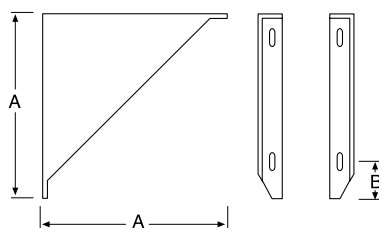

Øi	Øe	COD.	A	H
100	150	BFL316CREG15	50-100	40
110	180	BFL316CREG18	50-100	40
130	200	BFL316CREG20	50-100	40
150	230	BFL316CREG23	50-100	40
180	250	BFL316CREG25	50-100	40
200	300	BFL316CREG30	50-100	40
230	350	BFL316CREG35	50-100	40
250	400	BFL316CREG40	50-100	100

Øi	Øe	COD.	A	B
100	150	L316EXCS15	250	32
110	180	L316EXCS18	280	32
130	200	L316EXCS20	300	32
150	230	L316EXCS23	330	32
180	250	L316EXCS25	350	32
200	300	L316EXCS30	400	32
230	350	L316EXCS35	450	32
250	400	L316EXCS40	500	32

Øi	Øe	COD.	A	H
100	150	L316EXCOLSS1015	50-100	40
110	180	L316EXCOLSS1018	50-100	40
130	200	L316EXCOLSS1020	50-100	40
150	230	L316EXCOLSS1023	50-100	40
180	250	L316EXCOLSS1025	50-100	40
200	300	L316EXCOLSS1030	50-100	40
230	350	L316EXCOLSS1035	50-100	40
250	400	L316EXCOLSS1040	50-100	100

COAXY - CLVp 3CEp

COAXY - CLVp 3CEp



L316EXFACSS..

Fascetta di sicurezza.

Locking band.



LUBGN

Lubrificante per guarnizione.

Lubricant for seal.


Øi	Øe	COD.	H
100	150	L316EXFACSS15	20
110	180	L316EXFACSS18	20
130	200	L316EXFACSS20	20
150	230	L316EXFACSS23	20
180	250	L316EXFACSS25	20
200	300	L316EXFACSS30	20
230	350	L316EXFACSS35	20
250	400	L316EXFACSS40	20

COD.
LUBGN

A RICHIESTA - ON REQUEST

KIT COAXY CLVp 3CEp

DN 110/180 - DN 130/200 - DN 150/230

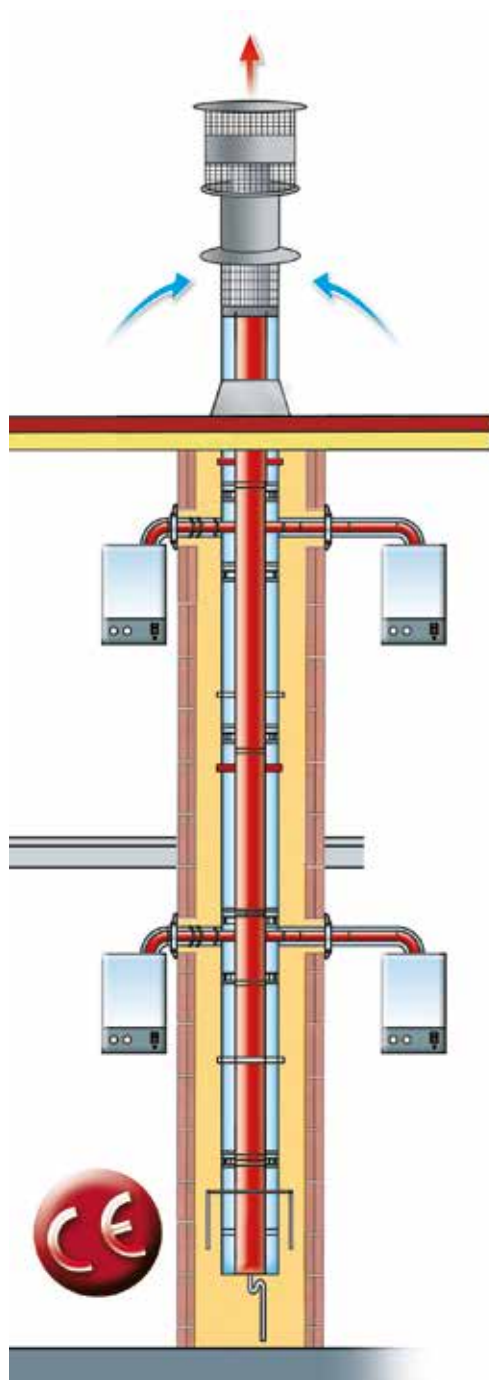

COD. CLVPKITT...

KIT TETTO	ROOF KIT	COD.	PCS
Terminale	Terminal	CLVPTDE	1
Tubo conc. 1 m	Conc. pipe 1 m	CLVP1	1
Faldale piano con fascetta anti intemperie	Flat flashing with storm collar	BFL316FPPSSF	1

COD. CLVPKITTB...

KIT TETTO "B"	ROOF "B" KIT	COD.	PCS
Terminale	Terminal	CLVPTDE	1
Tubo conc. 1 m	Conc. pipe 1 m	CLVP1	1
Fascetta anti intemperie	Storm collar	L316EXFAPS2S	1

COD. CLVPKITI...

KIT INTERPIANO	FLOOR KIT	COD.	PCS
T 93° h 940 mm uscita 80/125	93° tee h 940 mm outlet 80/125	CLVPCX3	1
Elem. telescopico 750-1200 mm	Adjustable pipe 750-1200 mm	CLVPEV2	1
Tubo conc. 1 m	Conc. pipe 1 m	CLVP 1	1
Collare a muro regolabile	Adjustable wall bracket	L316EXCOLSS10	1

COD. CLVPKITP...

KIT DI PARTENZA	STARTING KIT	COD.	PCS
T 93° h 940 mm uscita 80/125	93° tee h 940 mm outlet 80/125	CLVPCX3	1
Piastra intermedia	Intermediate anchor plate	CLVPPI	1
Coppia supporti	Cantilever brackets	L316EXCS	1
Scarico condensa	Tee cap with condense drain	CLVPSC2	1
Sifone	Siphon	CLVPSIFONE	1

COAXY - CLVp 3CEp

COAXY - CLVp 3CEp



CLVP1...
CLVP05...
CLVP02...



CLVPEV1...
CLVPEV2...
CLVPEV3...



CLVPG45...



CLVPPI...



CLVPCX1...



CLVPCX490...
CLVPCX390...



CLVPCX18...
CLVPCX318...



CLVPCX3...




CLVPR061...
CLVPR081...



CLVPR06901...
CLVPR08901...



CLVPR06181...
CLVPR08181...

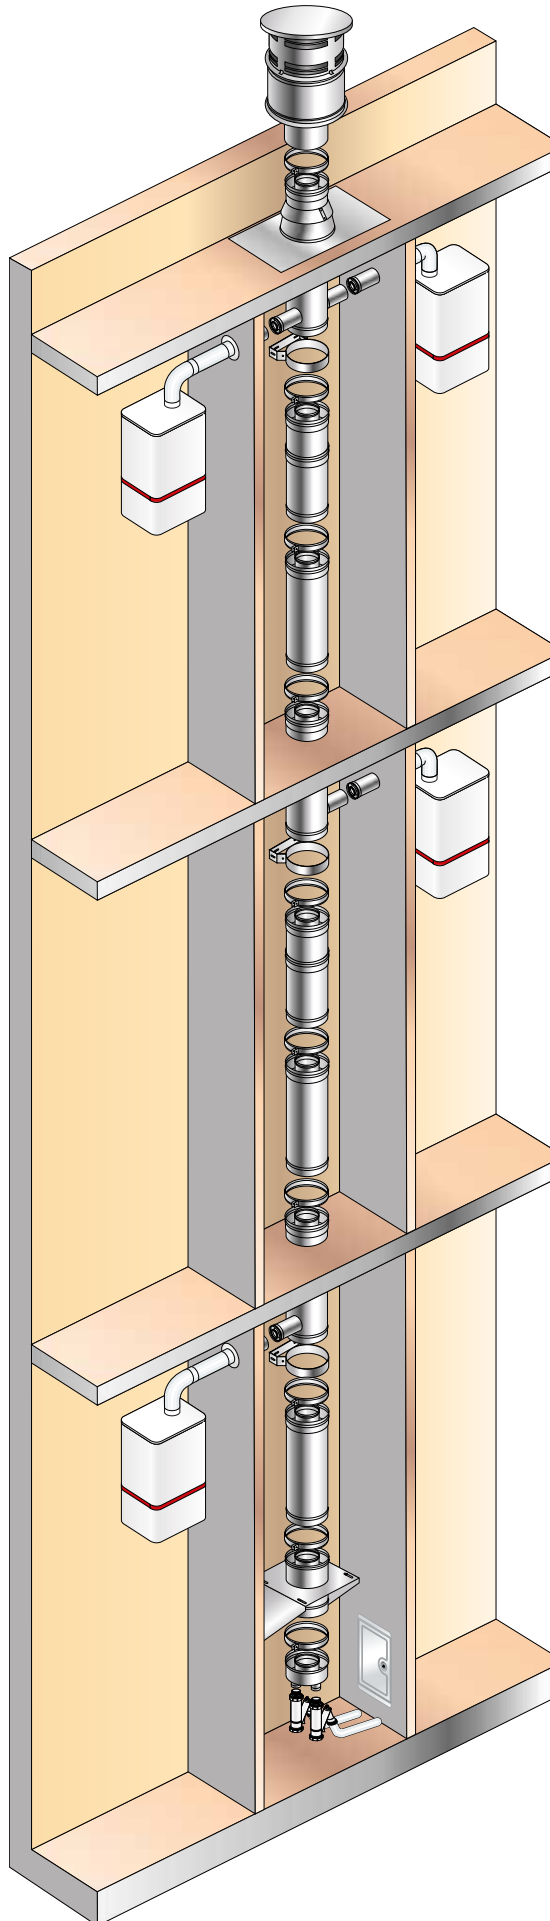

CLVPTDE...



CLVPSC2...



CLVPSIFONE



BFL316FPSSE...



BFL316FPSF...



BFL316FPS3S...



L316EXCS...



L316EXCOLSS10...



L316EX3LGN...



L316EXFACSS...



LUBGN